Bruhath Bangalore Mahanagara Palike Dasarahalli Zone

(me of Work: Detailed Estimated for Improvements to Road & Drains at Abbigere near old Watch Factory, in Ward no. 12, in Shettyhalli Sub-Division

Est .Cost Rs. 19.50 Lakhs

Sl No	Description of Items	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRB 2-1.1 Earthwork in surface excavation in ordinary soil for leveling and lowering the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe lines and cables) and removing the excavated stuff to a distance not exceeding 50m and lift up to 1.5m, excavated surface levelled and neatly dressed, disposed earth to be leveled after breaking of clods and neatly dressed as per specifications, specification No. KBS 2.1(a) / 2.3.1 Page No. 5/ Item No. 2.1/ PWD SR 2012-13								
		Cum	1	136.00	5.50	0.35	261.80		
			1	128.00	5.80	0.35	259.84		
			1	107.00	5.80	0.35	217.21		
							738.85	112.32	**82988**
	Basic Rate	**104.00**							
	Area Weightage 8%	8.32							
		112.32							
2	KSRRB M400-6.1 Construction of granular sub-base by providing close graded Material, mixing in a mechanical mix plant at OMC, carriage of mixed Material to work site, spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete as per Specifications. A. Plant Mix Method. close graded granular sub-base Material as per 400-1, For Grading – I Material Page No. 164/ Item No. 20.4.1/ PWD SR 2012-13								
		Cum	1	136.00	5.50	0.15	112.20		
			1	128.00	5.80	0.15	111.36		
			1	107.00	5.80	0.15	93.09		
							316.65	981.72	**310862**
	Basic Rate	909.00							
	Area Weightage 8%	72.72							
		981.72							
3	KSRRB M400-17 Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam Specifications including premixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per Specifications MORTH Specification No. 406 Page No. 167/ Item No. 20.18/ PWD SR 2012-13								
		Cum	1	136.00	5.50	0.20	149.60		
			1	128.00	5.80	0.20	148.48		
			1	107.00	5.80	0.20	124.12		
							422.20	1059.48	**447312**
	Basic Rate	981.00							
	Area Weightage 8%	78.48							
		1,059.48							
4	KSRRB 500-4 Providing and applying primer coat from 7.5 to 9.8 kg and 9.8 to 12.2 kg per 10 sqm for surfaces of low and medium porosity respectively over prepared surface of granular base with cut back M.C-70 or any other bitumen mixed with diesel at 10kg per 10sqm heated in bitumen boiler fitted with spray set (Excluding cleaning of road surface) including cost of all materials, labour, HOM of Machineries Complete as per Specifications. MORTH Chapter 5, -low porosity Page No. 172/ Item No. 21.4.1/ PWD SR 2012-13								
		Sqm	1	136.00	5.50		748.00		
			1	128.00	5.80		742.40		
			1	107.00	5.80		620.60		

							2111.00	68.36	144316
	Basic Rate	63.30							
	Area Weightage 8%	5.06							
		68.36							
5	KSRRB M500-19 Providing and laying bituminous concrete with 100-120 TPH batch type hot mix plant producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 5.4 to 5.6% of mix and filler, Transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MORTH specification clause No. 500.9 complete in all respects complete as per specifications. MORTH specification No 509, 30-45mm compacted thickness (Grading II) with 6% Bitumen 80/100 grade using 40-60 HMP Page No. 176/ Item No. 21.22.3/ PWD SR 2012-13								
	10th Cross	Cum	1	136.00	5.50	0.04	29.92		
	9th Cross		1	128.00	5.80	0.04	29.70		
	7th Cross		1	107.00	5.80	0.04	24.82		
							84.44	10504.08	886965
	Basic Rate	9,726.00							
	Area Weightage 8%	778.08							
		10,504.08							
6	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 10 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Item No. 17.1 KSRRB M 100-1 Rs. 62.20 (P.147 I.18.57/1)	Cum							
	Qty Vide Item No=1						738.85		
	Qty Limited to						738.85	100.35	74146.00
	Basic Rate	25.60							
	Loading and Unloading Charges	67.32							
		92.92							
	Area Weightage @ 8%	7.43							
	Total	100.35							
7	Miscellaneous and unforseen Charges								3411
								Total	1950000

(Rupees Nineteen Lakhs Five Thousand Only)

CERTIFICATE

1 The Work spot has been inspected and the work found to be necessary
2 The Estimate is prepared as per the PWD SR 2012-13
3 The Provision made in estimate are adequate and essential
4 This area comes under BBMP limits.

Asst Engineer
Ward No-12

Asst Executive Engineer
Shettyhalli Sub-Division

Executive Engineer
Dasarahalli Zone

ನಂ. JC(DH)AS 582/12-13 ದಿನಾಂಕ : 31/01/13
ರೂ. 19.50 Lakhs (Rupees Nineteen Lakhs fifty thousand only)
Page No.087
SL.No-582

BBMP
ನಂ. ಎಇ/00/75/365/12-13 ದಿನಾಂಕ : 05/2/2013
ರೂ. 19.50 Lakh (Nineteen Lakhs fifty thousand only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

SKETCH SHOWING IMPROVEMENTS TO ROAD & DRAINS AT ABBIGERE NEAR OLD WATCH FACTORY IN WARD NO-12 IN SHETTYHALLI SUB DIVISION.

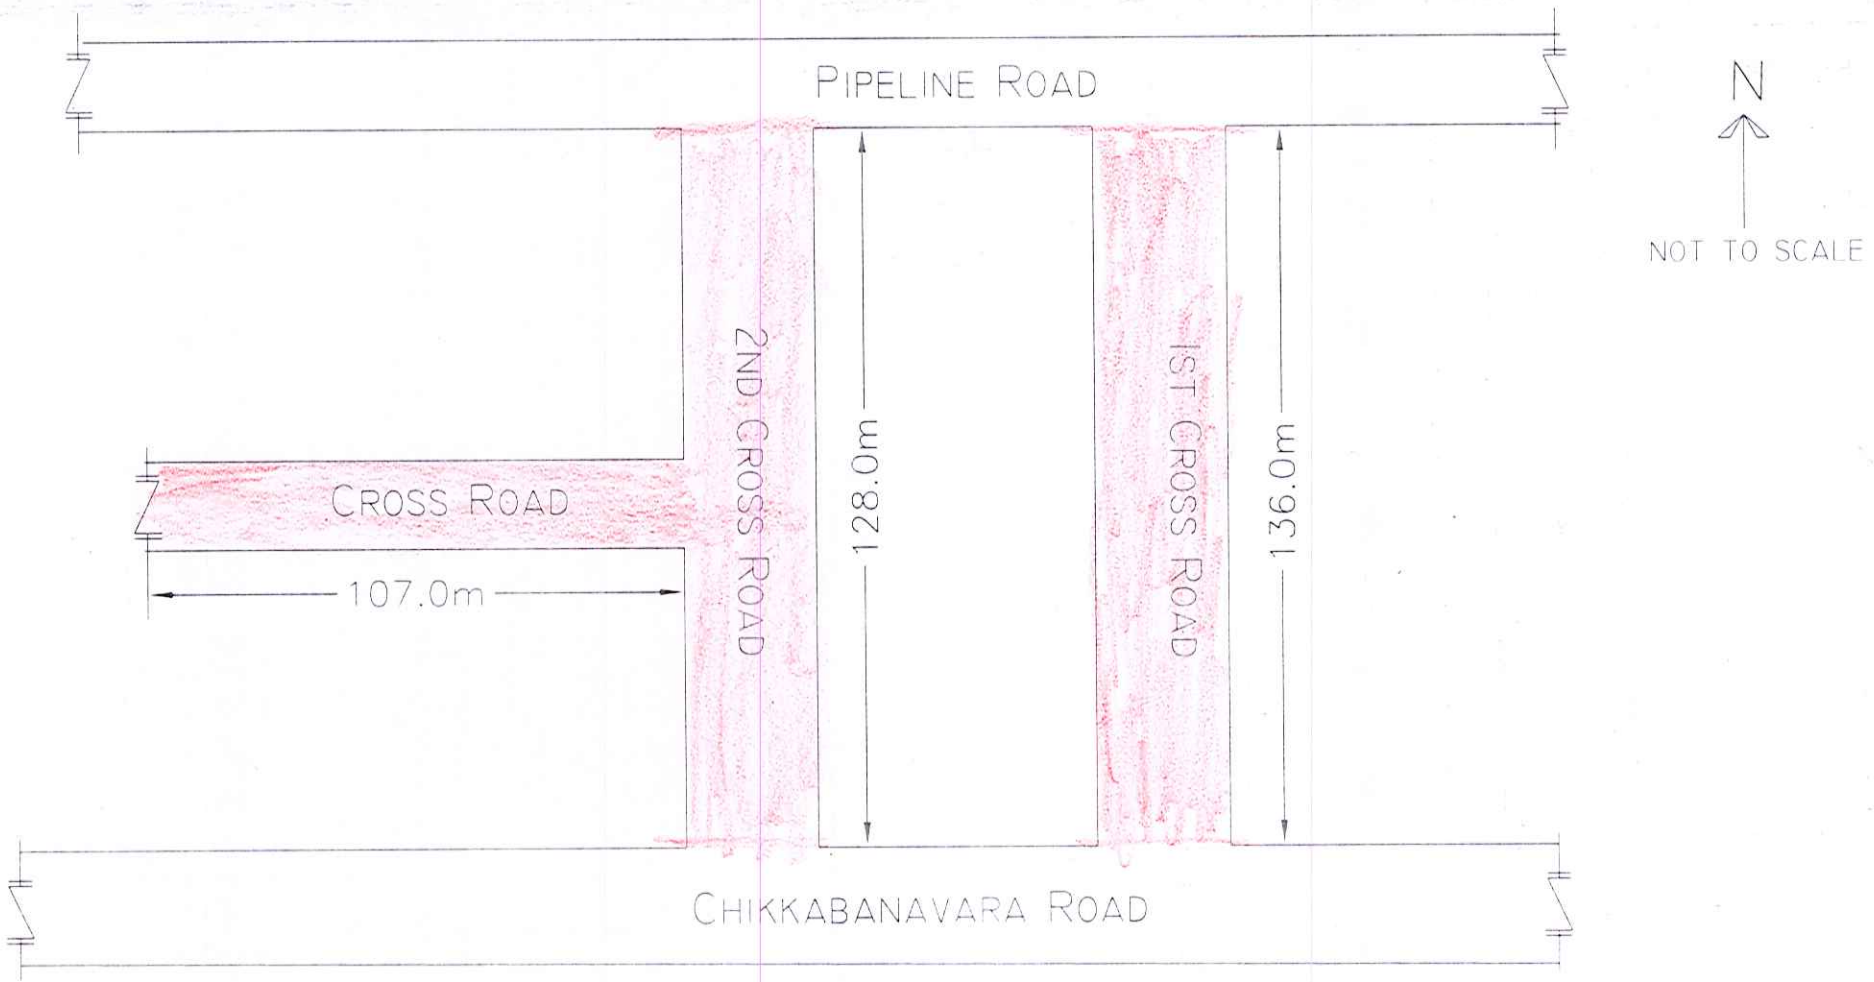

Asst Engineer
Ward No-12

Asst Executive Engineer
Shettyhalli Sub-Division
B.B.M.P

INDEX

▭ -- ASPHALTING